

Bath Shower Mixers




Installation & Aftercare Instructions

Taps shown are for illustrative purposes only and may not match the specific product you have purchased. Please retain these instructions for future reference.

INSTALLATION-BATH SHOWER MIXERS

Note: Prior to installation flush out the pipe work to remove debris and then ensure that the water supply is turned off. It is recommended that this product is installed by a qualified plumber, and that isolation points are installed on the supply pipework to allow for easier maintenance.

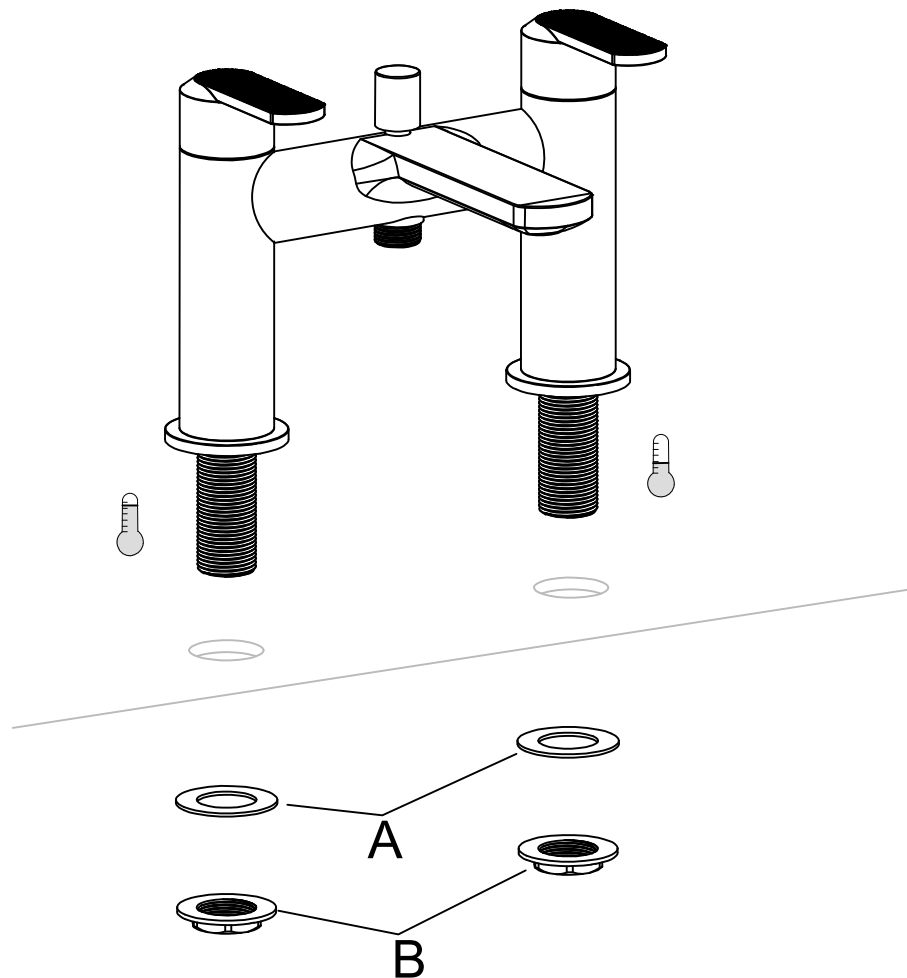

1. Prior to installation flush out the pipe work to remove debris and then ensure the water supply is turned off.
2. If installing on a bath tub that is not pre-drilled with tap holes, drill appropriate sized holes in the tap deck with a hole saw. These holes should be 180mm apart.
3. Fit the bath filler to the bath ensuring the (A) washers and (B) fixing nut are on the underside of the tap deck as shown.
4. Connect to the water supply. Ensure the fitting is not cross threaded to form a watertight seal. The hot water supply should always be connected to the left hand inlet.
5. Turn the water supply back on and fully open both valves to check all connections for leaks.

DIVERTER OPERATION INSTRUCTIONS

To switch between bath filling and shower handset outlets, pull the diverter handle up and twist to lock it into place. Twist the handle in the opposite direction and drop it down to switch back.

AFTERCARE INSTRUCTIONS

Whilst this item has a high quality durable finish, it should nevertheless be treated with care. Surfaces should be cleaned using only a soft damp cloth and clean water & dried using a soft cotton cloth. Do not use an abrasive material such as a brush or scouring pad to clean the surface. The use of abrasive cleaners, alcohol disinfectants will alter the surface finish and void the warranty.

Do not allow products such as toothpaste, shaving cream, drain and glass cleaners to remain on the surface. Prolonged contact with these products will alter surface finishes and void the warranty.

GUARANTEE

We have complete confidence in this product and as such it is offered with a 15-year guarantee against defects in manufacture. This product must be fitted by a competent installer. If in doubt seek advice from a qualified professional.

The guarantee requires that this product be used in the manner for which it was intended and that it is installed & maintained in accordance with the fitting instructions and local water bylaws. The guarantee is invalidated should the product be damaged by water borne debris. Make sure that supply pipes are clear of any debris prior to installation, this is particularly important on new plumbing installations.

In the unlikely event that this product should fail during the guarantee period we will either replace the faulty part or the complete unit as appropriate. This guarantee covers damage against reasonable wear and tear in use only. It does not cover damage incurred during installation, misuse or inappropriate maintenance.

We recommend that the cartridge is regularly cleaned in hard water areas to prevent lime scale build-up. Replacement cartridges are available to purchase by contacting the customer service team using the contact details below. Failure to follow the terms outlined above will invalidate this guarantee. Proof of purchase will be required to validate any guarantee claims.