INSTALLATION PROCEDURE

Dual fuel

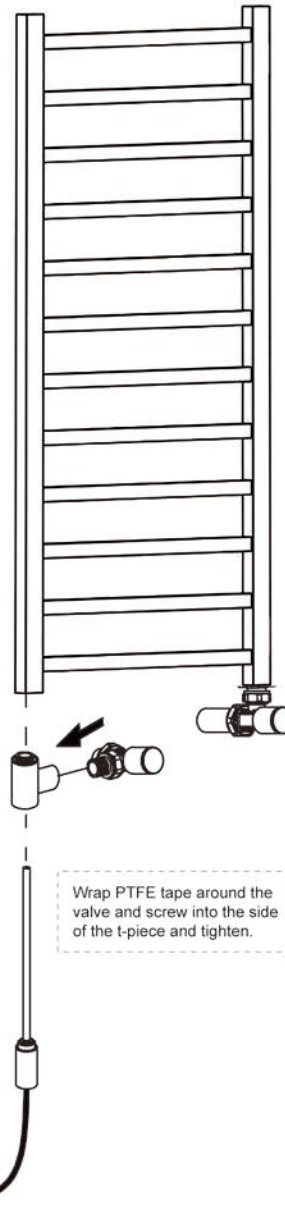

Before you turn on the heating element, make sure the radiator has been topped up with enough liquid inside by below steps:

1) Close the outlet valve, and open the air vent
2) Open the inlet valve, allowing the water to fill in the radiator till the water start to come out of the air vent.
3) Close the inlet valve & leave the air vent open
4) Turn on the heating element & allowing the to come out of the air vent for a while.
5) Close the air vent. It's done.

Wrap PTFE tape around the threads on the T-piece and insert into the inlet. Opening on the bottom of the radiator and tighten.

Wrap PTFE tape around the outlet valve and insert into bottom of radiator

Wrap PTFE tape around the valve and screw into the side of the t-piece and tighten.

Wrap PTFE tape around the threads of the element and insert into the radiator through the bottom of the t-piece and tighten.